

Railed Seat with Seat Clamp and Seat Post Install




Parts

- A. Railed Seat with Seat Clamp
- B. Seat Post

Tools Needed

1. 14mm wrench
2. 3 Way Allen Wrench

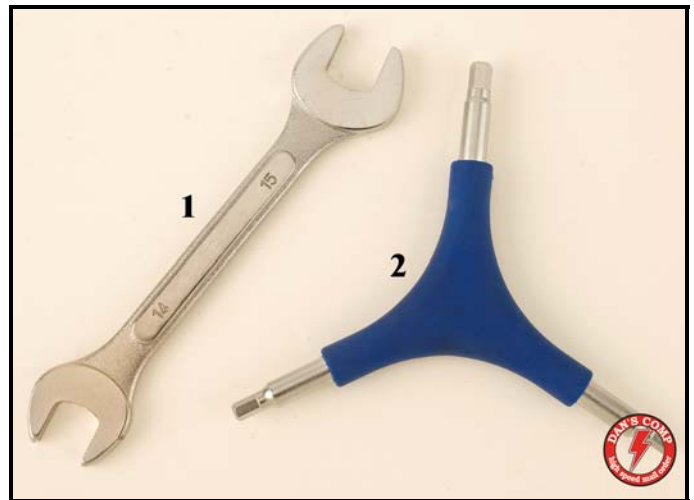

Preparing the Seat

- Loosen both of the nuts on the seat clamp. Do not remove them completely.

These instructions are to be used as a guide only. Improperly installed parts may lead to severe injury or harm. We strongly recommend that a properly trained bike mechanic handle all installations, adjustments and repairs on your bike. As always...Ride Safe!

Railed Seat with Seat Clamp and Seat Post Install

Installing the Seat

- Slide the seat clamp onto the seat post. You may need to loosen the nuts on the seat clamp a little more.
- Evenly tighten up both nuts on the seat clamp so the seat will stay on the seat post. Do not tighten completely.



Installing the Seat Post in the Frame

- With the seat installed on the seat post, tap the front of the seat to move it back or tap the back of the seat to move it forward.
- Install the seat and post in your frame to the desired height. Again, do not tighten completely.
- With the seat and seat post installed in the frame, you'll need to set the seat to the desired angle.
- As a Rule of Thumb, align the top of the seat parallel to the top tube of the frame.
- Once you've adjusted the seat angle, completely tighten both of the nuts on the seat clamp.

Last, but not least...

- Standing behind the seat and looking down toward the top tube of the frame, line up the front of the seat with the top tube.
- Tighten your seat post clamp completely.



These instructions are to be used as a guide only. Improperly installed parts may lead to severe injury or harm. We strongly recommend that a properly trained bike mechanic handle all installations, adjustments and repairs on your bike. As always...Ride Safe!